


Medical Display Series Solution

MEDDP-622

22" Fanless Slim Medical LCD Monitor



CE FC

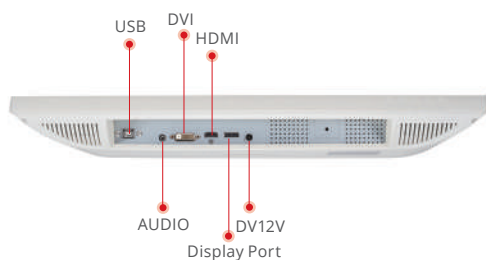

Features

- 21.5" LCD Panel with LED Backlight
- Compact and TerseDesign
- DVI x 1, HDMI x 1, DPx1
- True Flat Screen with Capacitive Touch
- Invisible OSD Design
- Speaker -2 x built-in

Specifications

Display

Size	21.5"
Resolution	Full HD 1920 x 1080
Max. Colors	16.7M
Brightness (Typ.)	350 nits
Viewing Angle (CR=10)(Typ.)	178° (H)/178° (V)
Contrast Ratio (Typ.)	1000:1
Touch Screen	Projective capacitive touch screen (optional)
IP Grade	IP 22

System

OS Support	Windows® XP, Windows® 7, Windows® 10
DICOM Support	Optional

I/O

Audio	Audio-out x 1
Serial Port	USB x 1 for touch controller
Signal	DVIx 1, HDMI x 1, DP x1
Speaker	2W speaker x 2 on back side

Mechanical and Environmental

Power Consumption	Full Loading :28.7Watts
Power Requirement	DC12V
Operating Temperature	5°C ~ 40°C(41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C(14°F ~ 140°F)
Storage Humidity	10%~90%@35°C, non-condensing
Dimension	527.3 x 348.5 x 55.1 mm
Packing Size	570 x 478 x 260 mm
Gross Weight	8.4kg (18.51lb)
Net Weight	5.7kg (12.56lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013/A12:2014(V3.1) FCC: Part 18 Class B

Ordering Information

- » MEDDP-622HNN-A1-1010
21.5" LCD Monitor.350 nits,DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter
- » MEDDP-622HPN-A1-1010
21.5" LCD Monitor.350 nits, P-CAP Touch,DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter
- » MEDDP-622TND-A1-1010
21.5" LCD Monitor.350 nits,DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter, DICOM
- » MEDDP-622TPD-A1-1010
21.5" LCD Monitor.350 nits, P-CAP Touch, DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter, DICOM